

Assembly instructions for the hologram holder


1. Fix the white terminal block to the box with a screw.



2. Attach the plastic LED holder to the front of the box where the two small holes are. Use a larger screwdriver for this step.



3. Pass the LED cables through the holes.

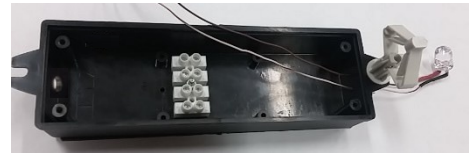


4. Place the LED in the holder and secure it with a cable tie. Cut the remaining part of the cable tie with a side cutter.



5. Screw in the switch.



6. Assemble the circuit, and fix the cable ends to the terminal block with a screwdriver. First attach the connecting cables of the 9 V battery to the terminal block. Snap the battery onto its connector only after the circuit has been assembled.

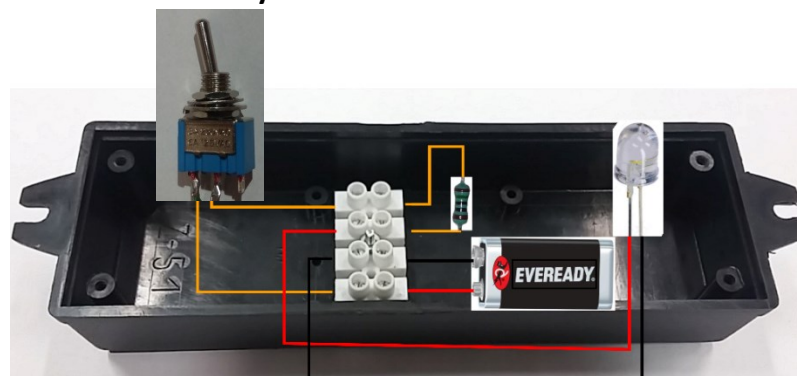




7. Turn on the switch to see if the LED lights up.



8. Use the shorter screw to attach the L-shaped metallic plate to the box on the side opposite from the LED.



9. Use a longer screw to attach the Plexiglas plate to the L-shaped metallic plate.



10. Use longer screws to fasten the black velvet and the hologram to the Plexiglas plate. Make sure the hologram is in the correct orientation. Do not glue the velvet to the Plexiglas, and only tighten the screws loosely to avoid damaging the glass of the hologram.



11. Snap the top of the box to its place to close the box and then fix it with four screws. For this step use a larger screwdriver.

